

ViewSonic®  PROJECTOR
LS550WH


Key Features

- 3rd generation LED technology with 30,000 hours lifespan
- 3,000 LED Lumens offering bright images in any environment
- Instant power on/off for efficient use
- 0.49 short throw ratio for minima space consumption
- 360° projection and H/V keystone for easy installation



Product Omschrijving

The LS550WH is ViewSonic's first lamp-free high brightness WXGA short throw projector for business and education. Built with advanced 3rd generation LED technology, the LS550WH provides 3,000 LED Lumens and eliminates frequent lamp replacement and toxic mercury for a safer and greener environment, offering a phenomenal lifespan of 30,000 hours, less power consumption, true-to-life colours with 125% Rec.709, and instant power on/off capability for efficient use. The 0.49 short throw lens provides a 100" screen from just 1.06m away, delivering exceptional space efficiency and freeing presenters from blinding lights. Installation and setup are hassle-free with 360° tilt angle projection, H/V Keystone, and 4 corner adjustment capabilities while its comprehensive LAN control eases multiple device management and is compatible with Crestron, AMX, Extron, PJ Link, ATEN, and ViewSonic's vController.

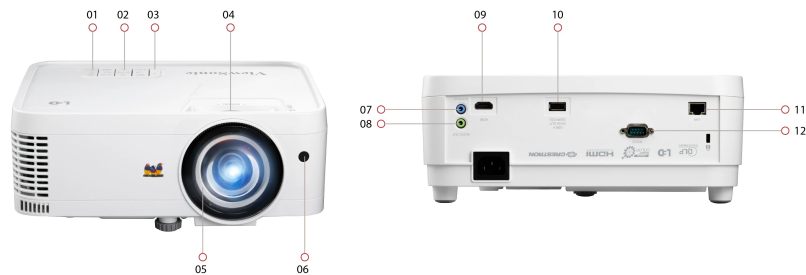

- 1. LED Indicator
- 2. Keypad
- 3. Power Button
- 4. Focus Ring
- 5. Lens
- 6. Front IR
- 7. Audio In

- 8. Audio Out
- 9. HDMI
- 10. USB Type A(5V/2A, Service)
- 11. LAN
- 12. RS-232

Bezoek Gebruikers  www.viewsonic.com

SPECIFICATIE

Projectiesysteem:	0.65" WXGA
Native resolutie:	1280x800
DMD-type:	DC3
Helderheid:	3000 (LED Lumens)
Contrastverhouding:	3000000:1
Weergavekleur:	1.07 Billion Colours
Type lichtbron:	LED
Light Source Life (hours) with Normal Mode:	up to 30000
Lamp Watt:	RGB LED
Lens:	F=2.6, f=6.9mm
Projectie offset:	110%+/-5%
Throw Ratio:	0.49
Optische zoom:	Fixed
Digitale zoom:	0.8x-2.0x
Afbeeldingsformaat:	60"-300"
Throw Distance:	0.63m-1.58m (87"@0.92m)
Keystone:	H:+/-40° , V:+36°/-40°
Hoorbaar geluid (normaal):	30dB
Audible Noise (Eco):	26dB
Ingangsvertraging:	16ms
Resolutie Ondersteuning:	VGA(640 x 480) to FullHD(1920 x 1080)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibiliteit:	NTSC, PAL, SECAM
Horizontale frequentie:	15K-102KHz
Verticale scansnelheid:	23-120Hz
Interactieve camera:	Optional (vTouch-10s)

INVOER

HDMI:	1(HDMI 1.4/ HDCP 1.4)
Audio-in (3.5mm):	1

UITGANG

Audio-out (3.5mm):	1
Speaker:	2W
USB Type A (voeding):	1 (5V/2A)

CONTROLE

RS232 (DB 9-pin male):	1
RJ45 (LAN control):	1
USB Type A (Services):	1(share with USB A Output)

ANDEREN

Voedingsspanning:	100-240V+/- 10%, 50/60Hz(AC in)
Energieverbruik:	Normal: 157W Standby: <0.5W
Bedrijfstemperatuur::	0~40°C
Carton:	Brown
Netto gewicht:	2.45kg
Afmetingen (BxDxH) met stelvoet:	293x221x115mm
OSD Taal:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Hungarian. Total 24 languages

STANDARD ACCESSORY

Stroomdraad:	1
Afstandsbediening:	1
QSG:	Yes
Lens Cover:	Yes

OPTIONELE ACCESSOIRE

Wall/Ceiling Mount:	PJ-WMK-305PJ-WMK-007
Draagtas:	PJ-CASE-008